

## Vascular perspectives

innovations for the interventionalist

### STRIDE MICROCATHETER

Super-selective micro-catheter which enables approaches to far desired targets



Stride 2.2Fr is designed as a Super-selective Micro-catheter enabling approaches to distal vessels. Stride 2.6Fr is designed as a High-flow Micro-catheter which allows easier introduction of embolic materials and agents.

**Stride 2.2Fr Features**

- **2cm flexible distal part**  
Helps the catheter to manoeuvre super-selectively into distal vasculatures
- **Guidewire support**  
Stride 2.2Fr reinforces torque transmission of guidewire and creates great backup support for penetration into complex lesion.


**Stride 2.6Fr Features**

- **0.027inch wide lumen**  
Realizes easy insertion of high-flow embolic and viscous agents
- **2.6Fr distal outer diameter**  
Enables distal approaches to narrow down infusion area

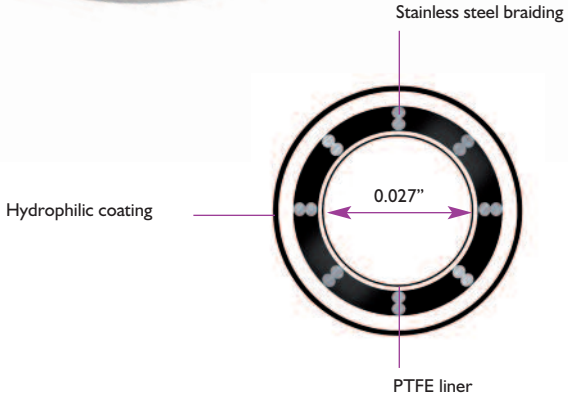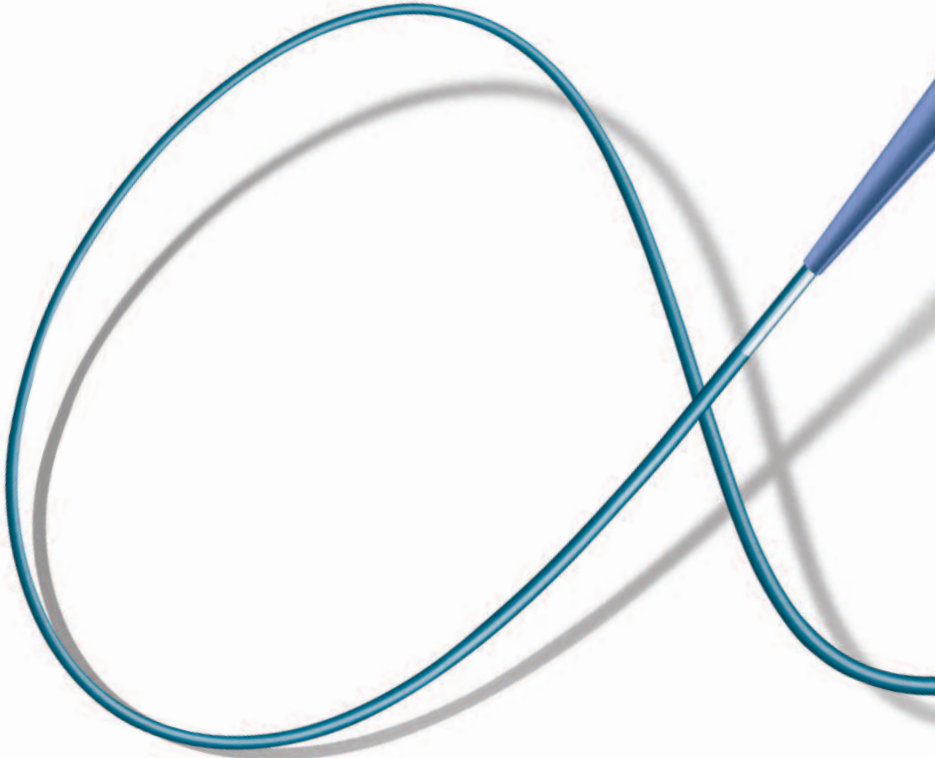

# Vascular perspectives

innovations for the interventionalist

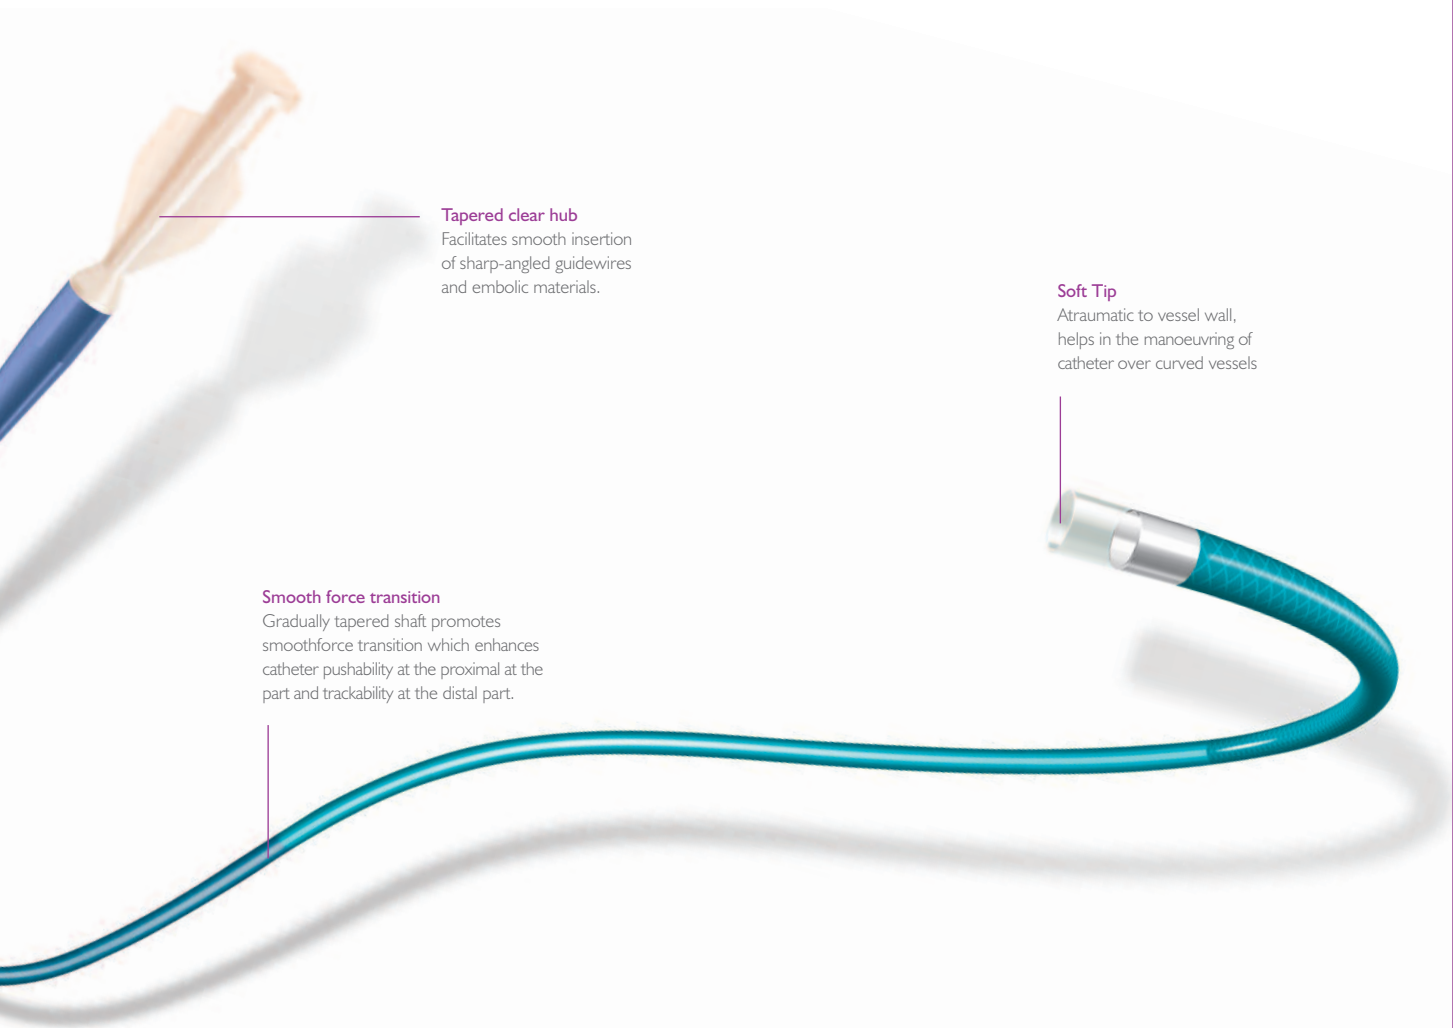

**Tapered clear hub**


Facilitates smooth insertion of sharp-angled guidewires and embolic materials.

**Soft Tip**

Atraumatic to vessel wall, helps in the manoeuvring of catheter over curved vessels

**Smooth force transition**

Gradually tapered shaft promotes smooth force transition which enhances catheter pushability at the proximal at the part and trackability at the distal part.

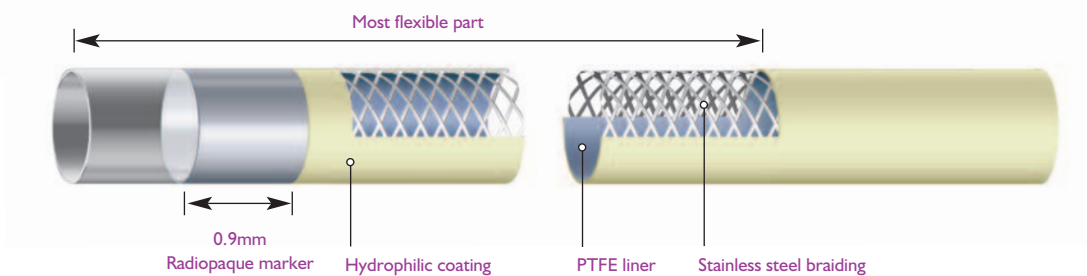

## Ordering information

## Stride Microcatheter 2.2Fr

Cat. No.	Usable Length (cm)	Most Flexible Length (cm)	Flexible Length	O.D. of Distal Shaft (mm/Fr)	O.D. of Proximal Shaft (mm/Fr)	I.D. of Shaft (mm/inch)	Max. Guidewire (mm/inch)	Hydrophilic Coating (cm)	Max. (kPa/psi)	Tip Shape
STD105-22S	105	2	28	0.74/2.2	0.95/2.9	0.52/0.020	0.41/0.016	65	5,520/800	Straight
STD125-22S	125	2	28	0.74/2.2	0.95/2.9	0.52/0.020	0.41/0.016	65	5,520/800	Straight
STD125-22A	125	2	28	0.74/2.2	0.95/2.9	0.52/0.020	0.41/0.016	65	5,520/800	Angled 45°
STD130-22S	130	2	28	0.74/2.2	0.95/2.9	0.52/0.020	0.41/0.016	65	5,520/800	Straight
STD150-22S	150	2	28	0.74/2.2	0.95/2.9	0.52/0.020	0.41/0.016	100	5,520/800	Straight

## Stride Microcatheter 2.6Fr

Cat. No.	Usable Length (cm)	Most Flexible Length (cm)	Flexible Length	O.D. of Distal Shaft (mm/Fr)	O.D. of Proximal Shaft (mm/Fr)	I.D. of Shaft (mm/inch)	Max. Guidewire (mm/inch)	Hydrophilic Coating (cm)	Max. (kPa/psi)	Tip Shape
STD105-26S	105	2	20	0.88/2.6	0.97/2.9	0.69/0.027	0.53/0.021	65	5,520/800	Straight
STD125-26S	125	2	20	0.88/2.6	0.97/2.9	0.69/0.027	0.53/0.021	65	5,520/800	Straight
STD150-26S	150	2	20	0.88/2.6	0.97/2.9	0.69/0.027	0.53/0.021	100	5,520/800	Straight

## Flow Rate

Test Condition: Temperature: 37°C Linear Rise Seconds: 0.3sec Flow Rate: 3.0ml/sec Volume: 10ml

Iodine Content (mg/ml)	French Size	Usable Length (cm)	600psi (ml/sec)	800psi (ml/sec)	Dead Volume (ml)	Iodine Content (mg/ml)	French Size	Usable Length (cm)	600psi (ml/sec)	800psi (ml/sec)	Dead Volume (ml)
Iopamiron 300	Stride 2.2	105	1.2	1.6	0.37	Iopamiron 370	Stride 2.2	105	0.6	0.7	0.37
		125	1.0	1.4	0.41			125	0.5	0.6	0.41
		130	1.0	1.2	0.43			130	0.5	0.6	0.43
		150	0.9	1.1	0.46			150	0.4	0.5	0.46
	Stride 2.6	105	3.3	4.5	0.54		Stride 2.6	105	2.1	2.5	0.54
125		3.0	3.7	0.61	125	1.5		2.1	0.61		
150		2.6	3.3	0.71	150	1.2		1.6	0.71		

# Vascularperspectives

innovations for the interventionalist

Parkview House  
127 Styal Road  
Heald Green, Cheadle  
Cheshire SK8 3TG, UK

Tel: 0161 491 0585  
Fax: 0161 282 6540  
Web: vascularperspectives.com  
Email: info@vpmed.co.uk